

Minimum Spanning Tree Problem

Given: *Undirected connected weighted graph* (\mathcal{G}, W)

Output: *An MST of \mathcal{G}*

Algorithms and Data Structures: Minimum Spanning Trees (Kruskal)

- ▶ We have already seen the PRIM algorithm, which runs in $O((m+n) \lg(n))$ time (standard Heap implementation) for graphs with n vertices and m edges.
- ▶ In this lecture we will see KRUSKAL's algorithm, a different approach to constructing a MST.

ADS: lecture 16 – slide 1 –

Kruskal's Algorithm

A **forest** is a graph whose connected components are trees.

Idea

Starting from a spanning forest with no edges, repeatedly add edges of minimum weight (never creating a cycle) until the forest becomes a tree.


Algorithm KRUSKAL(\mathcal{G}, W)

1. $F \leftarrow \emptyset$
2. **for all** $e \in E$ in the order of increasing weight **do**
3. **if** the endpoints of e are in different connected components of (V, F) **then**
4. $F \leftarrow F \cup \{e\}$
5. **return** tree with edge set F

ADS: lecture 16 – slide 3 –

ADS: lecture 16 – slide 2 –

Example

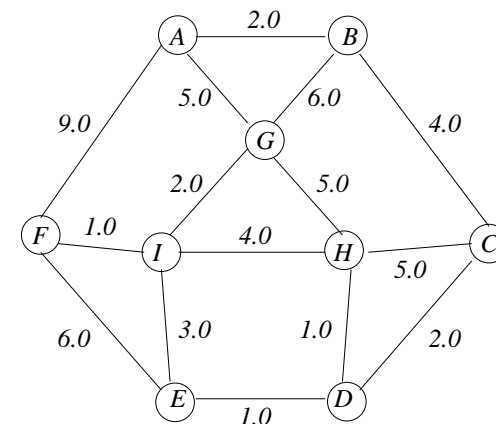

ADS: lecture 16 – slide 4 –

Correctness of Kruskal's algorithm

1. Throughout the execution of KRUSKAL, (V, F) remains a spanning forest.
Proof: (V, F) is a spanning subgraph because the vertex set is V . It always remains a forest because edges with endpoints in different connected components never induce a cycle.
2. Eventually, (V, F) will be connected and thus a spanning tree.
Proof: Suppose that after the complete execution of the loop, (V, F) has a connected component (V_1, F_1) with $V_1 \neq V$. Since \mathcal{G} is connected, there is an edge $e \in E$ with exactly one endpoint in V_1 . This edge would have been added to F when being processed in the loop, so this can never happen.
3. Throughout the execution of KRUSKAL, (V, F) is contained in some MST of \mathcal{G} .
Proof: Similar to the proof of the corresponding statement for Prim's algorithm. Will prove in week 9 Tutorial.

ADS: lecture 16 – slide 5 –

Implementation of Kruskal's Algorithm

Algorithm KRUSKAL(\mathcal{G}, W)

1. $F \leftarrow \emptyset$
2. **for all** vertices v of \mathcal{G} **do**
3. MAKE-SET(v)
4. sort edges of \mathcal{G} into non-decreasing order by weight
5. **for all** edges (u, v) of \mathcal{G} in non-decreasing order by weight **do**
6. **if** FIND-SET(u) \neq FIND-SET(v) **then**
7. $F \leftarrow F \cup \{(u, v)\}$
8. UNION(u, v)
9. **return** F

ADS: lecture 16 – slide 7 –

Data Structures for Disjoint Sets

- ▶ A **disjoint set** data structure maintains a collection $\mathcal{S} = \{S_1, \dots, S_k\}$ of **disjoint sets**.
- ▶ The sets are *dynamic*, i.e., they may change over time.
- ▶ Each set S_i is identified by some *representative*, which is some member of that set.

Operations:

- ▶ MAKE-SET(x): Creates new set whose only member is x . The representative is x .
- ▶ UNION(x, y): Unites set S_x containing x and set S_y containing y into a new set S and removes S_x and S_y from the collection.
- ▶ FIND-SET(x): Returns representative of the set holding x .

ADS: lecture 16 – slide 6 –

Analysis of KRUSKAL

Let n be the number of vertices and m the number of edges of the input graph

- ▶ Line 1: $\Theta(1)$
- ▶ Loop in Lines 2–3: $\Theta(n \cdot T_{\text{MAKE-SET}}(n))$
- ▶ Line 4: $\Theta(m \lg m)$
- ▶ Loop in Lines 5–8: $\Theta\left(2m \cdot T_{\text{FIND-SET}}(n) + (n-1) \cdot T_{\text{UNION}}(n)\right)$.
- ▶ Line 9: $\Theta(1)$

Overall:

$$\Theta\left(nT_{\text{MAKE-SET}}(n) + (n-1)T_{\text{UNION}}(n) + m(\lg m + 2T_{\text{FIND-SET}}(n))\right)$$

ADS: lecture 16 – slide 8 –

Analysis of KRUSKAL (overview)

$$T(n, m) = \Theta\left(nT_{\text{MAKE-SET}}(n) + (n-1)T_{\text{UNION}}(n) + m(\lg m + 2T_{\text{FIND-SET}}(n))\right)$$

We will see that with standard efficient implementations of disjoint sets this amounts to

$$T(n, m) = \Theta(m \lg(m)).$$


- ▶ NOT better than the standard Heap implementation of PRIM for typical implementations of disjoint sets.
- ▶ Always have to sort the weights when using KRUSKAL:
 - ▶ $\Theta(m \lg(m))$ if the weights are arbitrarily large.

ADS: lecture 16 – slide 9 –

Example

Linked list representation of

$\{a, f\}$, $\{b\}$, $\{g, c, e\}$, $\{d\}$:

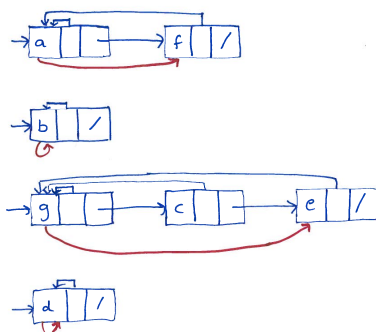


The "representatives" are a, b, g and d respectively
last[] pointers are in red

ADS: lecture 16 – slide 11 –

Linked List Implementation of Disjoint Sets

Each element represented by a pointer to a cell:



Use a linked list for each set.

Representative of the set is at the head of the list.

Each cell has a pointer direct to the representative (head of the list).

ADS: lecture 16 – slide 10 –

Analysis of Linked List Implementation

MAKE-SET: constant ($\Theta(1)$) time.

FIND-SET: constant ($\Theta(1)$) time.

UNION: Naive implementation of

$\text{UNION}(x, y)$

appends x's list onto end of y's list.

Assumption: Representative y of each set has attribute last[y]: a pointer to last cell of y's list.

Snag: have to update "representative pointer" in each cell of x's list to point to the representative (head) of y's list.

Cost is:

$\Theta(\text{length of } x\text{'s list}).$

ADS: lecture 16 – slide 12 –

Notation for Analysis

Express running time in terms of:

\hat{n} : the number of MAKE-SET operations,


\hat{m} : the number of MAKE-SET, UNION and FIND-SET operations overall.

Note

1. After $\hat{n} - 1$ UNION operations only one set remains.
2. $\hat{m} \geq \hat{n}$.

ADS: lecture 16 – slide 13 –

Example (UNION(g, b)))

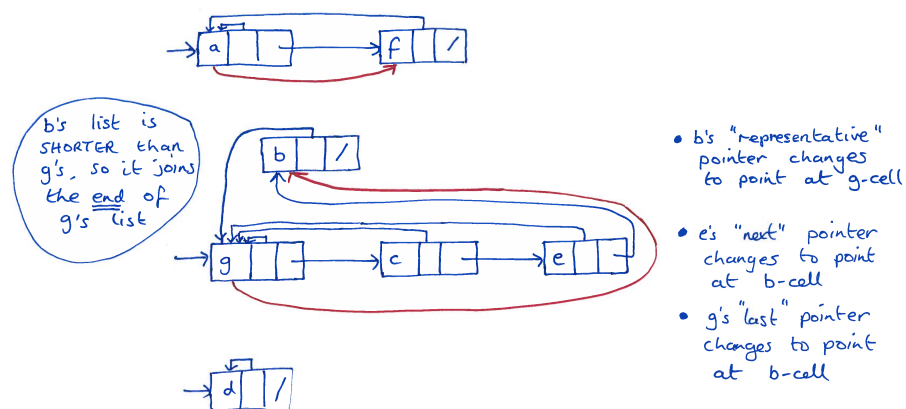

result of performing Union(g, b)

ADS: lecture 16 – slide 15 –

Weighted-Union Heuristic

Idea

Maintain a "length" field for each list. To execute

UNION(x, y)

append shorter list to longer one (breaking ties arbitrarily).

Theorem 1

Using the linked-list representation of disjoint sets and the weighted-union heuristic, a sequence of \hat{m} MAKE-SET, UNION & FIND-SET operations, \hat{n} of which are MAKE-SET operations, takes

$$O(\hat{m} + \hat{n} \lg \hat{n})$$

time.

"Proof": Each element appears at most $\lg \hat{n}$ times in the short list of a UNION.

ADS: lecture 16 – slide 14 –

KRUSKAL with Linked lists (weighted union)

The run-time for KRUSKAL (for $\mathcal{G} = (V, E)$ with $|V| = n, |E| = m$) is

$$T(n, m) = \Theta\left(nT_{\text{MAKE-SET}}(n) + (n-1)T_{\text{UNION}}(n) + m(\lg m + 2T_{\text{FIND-SET}}(n))\right)$$

In terms of the collection of "Disjoint-sets" operations, we have $\hat{m} = 2n + 2m - 1$ operations, $\hat{n} = n$ which are UNION. So

$$\begin{aligned} T(n, m) &= \Theta(m \lg(m) + (2n + 2m - 1) + n \lg(n)) \\ &= \Theta(m \lg(m)) \end{aligned}$$

ADS: lecture 16 – slide 16 –