

Programming Securely II

Computer Security Lecture 12

David Aspinall

School of Informatics
University of Edinburgh

6th March 2014

Outline

Web security issues

Java Security: Coding and Models

Trusting code

Language futures for security

Programming and Security

Programming Securely To develop code in a secure manner so that the code itself is not a vulnerability that can be exploited by an attacker.

Programming Security To develop code for security-specific functions such as encryption, digital signatures, firewalls, etc.

In this lecture, we look at both sides:

- ▶ continuing programming securely: some **web application** security issues and some **Java** guidelines.
- ▶ programming security: overview of **Java security APIs** and **current and future trust models**.

Outline

Web security issues

Java Security: Coding and Models

Trusting code

Language futures for security

Web security: client-side threats

- ▶ Risky treatment of **MIME-types**: e.g., shell-escapes in troff. By design, downloaded **active content** (e.g., Java, ActiveX controls) should run in a restricted environment. Problems come when restrictions fail, or aren't tight enough.

Web security: client-side threats

- ▶ Risky treatment of **MIME-types**: e.g., shell-escapes in troff. By design, downloaded **active content** (e.g., Java, ActiveX controls) should run in a restricted environment. Problems come when restrictions fail, or aren't tight enough.
- ▶ SSL issues: revoked certificates, spoofed site names, mixed encrypted/unencrypted pages.

Web security: client-side threats

- ▶ Risky treatment of **MIME-types**: e.g., shell-escapes in troff. By design, downloaded **active content** (e.g., Java, ActiveX controls) should run in a restricted environment. Problems come when restrictions fail, or aren't tight enough.
- ▶ SSL issues: revoked certificates, spoofed site names, mixed encrypted/unencrypted pages.
- ▶ Browsers store **cookies** which have confidentiality implications. Even without cookies, web browsing is less anonymous than it feels: information is stored in browser's history and document cache, firewall and proxy logs, and the remote sites visited, even before any spyware is present. (All great for market researchers).

Web security: client-side threats

- ▶ Risky treatment of **MIME-types**: e.g., shell-escapes in troff. By design, downloaded **active content** (e.g., Java, ActiveX controls) should run in a restricted environment. Problems come when restrictions fail, or aren't tight enough.
- ▶ SSL issues: revoked certificates, spoofed site names, mixed encrypted/unencrypted pages.
- ▶ Browsers store **cookies** which have confidentiality implications. Even without cookies, web browsing is less anonymous than it feels: information is stored in browser's history and document cache, firewall and proxy logs, and the remote sites visited, even before any spyware is present. (All great for market researchers).
- ▶ Untrained users unwittingly make bad security decisions.

Web security: client-side threats

- ▶ Risky treatment of **MIME-types**: e.g., shell-escapes in troff. By design, downloaded **active content** (e.g., Java, ActiveX controls) should run in a restricted environment. Problems come when restrictions fail, or aren't tight enough.
- ▶ SSL issues: revoked certificates, spoofed site names, mixed encrypted/unencrypted pages.
- ▶ Browsers store **cookies** which have confidentiality implications. Even without cookies, web browsing is less anonymous than it feels: information is stored in browser's history and document cache, firewall and proxy logs, and the remote sites visited, even before any spyware is present. (All great for market researchers).
- ▶ Untrained users unwittingly make bad security decisions.
- ▶ Buggy browsers: buffer overflows, crypto bugs, etc.

Web security: server-side threats

- ▶ Access control: should prevent certain files being served.

Web security: server-side threats

- ▶ Access control: should prevent certain files being served.
- ▶ Complex or malicious URLs

Web security: server-side threats

- ▶ Access control: should prevent certain files being served.
- ▶ Complex or malicious URLs
- ▶ Denial of service attacks

Web security: server-side threats

- ▶ Access control: should prevent certain files being served.
- ▶ Complex or malicious URLs
- ▶ Denial of service attacks
- ▶ Remote authoring and administration tools

Web security: server-side threats

- ▶ Access control: should prevent certain files being served.
- ▶ Complex or malicious URLs
- ▶ Denial of service attacks
- ▶ Remote authoring and administration tools
- ▶ Buggy servers, with attendant security risks

Web security: server-side threats

- ▶ Access control: should prevent certain files being served.
- ▶ Complex or malicious URLs
- ▶ Denial of service attacks
- ▶ Remote authoring and administration tools
- ▶ Buggy servers, with attendant security risks
- ▶ Server-side **scripting languages**: C or shell CGI, PHP, ASP, JSP, Python, Ruby, all have serious security implications in configuration and execution. File systems and permissions have to be carefully designed. That's before any implemented *web application* is even considered...

Web programming: application security

Many issues (some of which are introduced in the practical).

Web programming: application security

Many issues (some of which are introduced in the practical).

- ▶ **Input validation:** to prevent SQL injection, command injection, other confidentiality attacks. Ajax: *beware client-side validation!* Understand metacharacters at every point. Use labels/indexes for hidden values, not values themselves.

Web programming: application security

Many issues (some of which are introduced in the practical).

- ▶ **Input validation:** to prevent SQL injection, command injection, other confidentiality attacks. Ajax: *beware client-side validation!* Understand metacharacters at every point. Use labels/indexes for hidden values, not values themselves.
- ▶ **Output filtering:** **cross-site scripting (XSS)**, when attacker-generated HTML appears on site: used for **session hijacking, phishing attacks**. Beware passing informative error messages.

Web programming: application security

Many issues (some of which are introduced in the practical).

- ▶ **Input validation:** to prevent SQL injection, command injection, other confidentiality attacks. Ajax: *beware client-side validation!* Understand metacharacters at every point. Use labels/indexes for hidden values, not values themselves.
- ▶ **Output filtering:** **cross-site scripting (XSS)**, when attacker-generated HTML appears on site: used for **session hijacking, phishing attacks**. Beware passing informative error messages.
- ▶ **Careful cryptography:** encryption/hashing to *protect server state in client*, use of *appropriate authentication* mechanisms for web accounts (never Referer header).

Outline

Web security issues

Java Security: Coding and Models

Trusting code

Language futures for security

Java Secure Coding Guidelines

- ▶ **Using modifiers.** Reduce scope of methods and fields; beware non-final public static (*global*) variables; avoid public fields, and add security checks to public accessors.

Java Secure Coding Guidelines

- ▶ **Using modifiers.** Reduce scope of methods and fields; beware non-final public static (*global*) variables; avoid public fields, and add security checks to public accessors.
- ▶ **Protecting packages.** Stop insertion of untrusted classes in a package using java.security properties or “sealed” JAR file; avoid package-level access.

Java Secure Coding Guidelines

- ▶ **Using modifiers.** Reduce scope of methods and fields; beware non-final public static (*global*) variables; avoid public fields, and add security checks to public accessors.
- ▶ **Protecting packages.** Stop insertion of untrusted classes in a package using java.security properties or “sealed” JAR file; avoid package-level access.
- ▶ **Beware mutable objects.** Returning or storing mutables may be risky, if caller then updates them; use immutable or *cloned* objects instead.

Java Secure Coding Guidelines

- ▶ **Using modifiers.** Reduce scope of methods and fields; beware non-final public static (*global*) variables; avoid public fields, and add security checks to public accessors.
- ▶ **Protecting packages.** Stop insertion of untrusted classes in a package using java.security properties or “sealed” JAR file; avoid package-level access.
- ▶ **Beware mutable objects.** Returning or storing mutables may be risky, if caller then updates them; use immutable or *cloned* objects instead.
- ▶ **Serialization.** Once serialized, objects are outside JVM security. Designate **transient** fields and encrypt/sign persistent data. Beware overriding of serialization methods (among others).

Java Secure Coding Guidelines

- ▶ **Using modifiers.** Reduce scope of methods and fields; beware non-final public static (*global*) variables; avoid public fields, and add security checks to public accessors.
- ▶ **Protecting packages.** Stop insertion of untrusted classes in a package using java.security properties or “sealed” JAR file; avoid package-level access.
- ▶ **Beware mutable objects.** Returning or storing mutables may be risky, if caller then updates them; use immutable or *cloned* objects instead.
- ▶ **Serialization.** Once serialized, objects are outside JVM security. Designate **transient** fields and encrypt/sign persistent data. Beware overriding of serialization methods (among others).
- ▶ **Clear sensitive information.** Store sensitive data in mutable objects, then clear explicitly ASAP, to prevent heap-inspection attacks. Can't rely on Java's garbage collection to do this.


Java Secure Coding Guidelines

- ▶ **Using modifiers.** Reduce scope of methods and fields; beware non-final public static (*global*) variables; avoid public fields, and add security checks to public accessors.
- ▶ **Protecting packages.** Stop insertion of untrusted classes in a package using java.security properties or “sealed” JAR file; avoid package-level access.
- ▶ **Beware mutable objects.** Returning or storing mutables may be risky, if caller then updates them; use immutable or *cloned* objects instead.
- ▶ **Serialization.** Once serialized, objects are outside JVM security. Designate **transient** fields and encrypt/sign persistent data. Beware overriding of serialization methods (among others).
- ▶ **Clear sensitive information.** Store sensitive data in mutable objects, then clear explicitly ASAP, to prevent heap-inspection attacks. Can't rely on Java's garbage collection to do this.

Access Control in Java


Java 1.0 had a **sandbox** security model, where downloaded Java applets ran in a restricted environment with no access to local files, etc: often too restrictive. Java 2 has a more flexible, fine-grained level of control:

Applications and applets are subject to a **security policy** which specifies **protection domains** based on **location** of code, whether it is **signed** by a trusted entity, and the user **identity**. Each domain specifies a set of **permissions** for accessing resources.

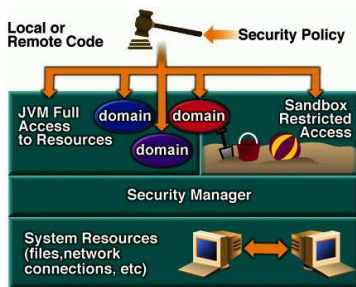

Java security architecture

- ▶ A SecurityManager is installed by web browsers for Java applets; an application must either itself install the security manager, or be invoked with the option `-Djava.security.manager`. If the security manager's checks fail, a `java.lang.SecurityException` is raised.
- ▶ Access control in Java is based on **protection domains** which group together the set of objects which are currently accessible by a principal.

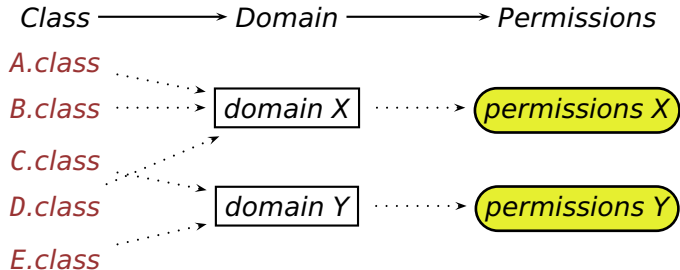

Java access control permissions

- ▶ Domains are associated with sets of **permissions**

java.security.AllPermission	every resource
java.io.FilePermission	file system access
java.net.SocketPermission	accept/connect based on host/IP & port
java.awt.AWTPermission	window-system permissions
java.lang.RuntimePermission	JVM config; threads; printing
java.security. SecurityPermission	accessing security policy, key store

Java access control permissions

- ▶ Domains are associated with sets of **permissions**

java.security.AllPermission	every resource
java.io.FilePermission	file system access
java.net.SocketPermission	accept/connect based on host/IP & p
java.awt.AWTPermission	window-system permissions
java.lang.RuntimePermission	JVM config; threads; printing
java.security. SecurityPermission	accessing security policy, key store

- ▶ Some are associated with **target** and **actions**:

Java access control permissions

- ▶ Domains are associated with sets of **permissions**

java.security.AllPermission	every resource
java.io.FilePermission	file system access
java.net.SocketPermission	accept/connect based on host/IP & port
java.awt.AWTPermission	window-system permissions
java.lang.RuntimePermission	JVM config; threads; printing
java.security. SecurityPermission	accessing security policy, key store

- ▶ Some are associated with **target** and **actions**:

```
import java.io.FilePermission;
FilePermission p1 = new
FilePermission("/tmp/myfile", "read");
FilePermission p2 = new
FilePermission("/tmp/*", "read");
```

Java access control permissions

- ▶ Domains are associated with sets of **permissions**

java.security.AllPermission	every resource
java.io.FilePermission	file system access
java.net.SocketPermission	accept/connect based on host/IP & port
java.awt.AWTPermission	window-system permissions
java.lang.RuntimePermission	JVM config; threads; printing
java.security. SecurityPermission	accessing security policy, key store

- ▶ Some are associated with **target** and **actions**:

```
import java.io.FilePermission;
FilePermission p1 = new
FilePermission("/tmp/myfile", "read");
FilePermission p2 = new
FilePermission("/tmp/*", "read");
```


Java access control permissions

- ▶ Domains are associated with sets of **permissions**

java.security.AllPermission	every resource
java.io.FilePermission	file system access
java.net.SocketPermission	accept/connect based on host/IP & port
java.awt.AWTPermission	window-system permissions
java.lang.RuntimePermission	JVM config; threads; printing
java.security. SecurityPermission	accessing security policy, key store

- ▶ Some are associated with **target** and **actions**:

```
import java.io.FilePermission;
FilePermission p1 = new
FilePermission("/tmp/myfile", "read");
FilePermission p2 = new
FilePermission("/tmp/*", "read");
```

Permissions implement an **implies** method for access control decisions. Here `p2.implies(p1)`.

Java security policies

- ▶ The system security policy for a Java application environment specifies permissions available for code from various sources, represented by a Policy object. Only one in effect at a time.
- ▶ A Policy object evaluates the global policy using the ProtectionDomain for a class, and returns an appropriate Permissions object.
- ▶ Java supplies a GUI **policytool** utility for editing ASCII format policy files, with entries like this, specifying a key store and zero or more “grant” entries:

```
keystore ".keystore", "JKS";  
grant principal com.sun.security.auth.UnixPrincipal "da" {  
    permission java.util.PropertyPermission "java.home", "read";  
    permission java.io.FilePermission "/tmp/foo", "read,write";  
};
```

Default, system policy is in

javahome/lib/security/java.policy. User policy is in *userhome.java.policy*.

Java security extensions

- ▶ The Java security extensions add additional APIs for programming security features.

Java security extensions

- ▶ The Java security extensions add additional APIs for programming security features.
- ▶ **Java Cryptography Extension (JCE)**
A Java framework for cryptographic functionality, including message digests, encryption, signing, and X.509 certificates.

Java security extensions

- ▶ The Java security extensions add additional APIs for programming security features.
- ▶ **Java Cryptography Extension (JCE)**
A Java framework for cryptographic functionality, including message digests, encryption, signing, and X.509 certificates.
- ▶ **Java Secure Socket Extension (JSSE).**

Java security extensions

- ▶ The Java security extensions add additional APIs for programming security features.
- ▶ **Java Cryptography Extension (JCE)**
A Java framework for cryptographic functionality, including message digests, encryption, signing, and X.509 certificates.
- ▶ **Java Secure Socket Extension (JSSE).**
- ▶ **Java Authentication and Authorization Service (JAAS).** Used for “reliable and secure” authentication of users, to determine who is currently executing Java code; and for authorization of users to ensure they have the permissions necessary for desired actions.

Java security extensions

- ▶ The Java security extensions add additional APIs for programming security features.
- ▶ **Java Cryptography Extension (JCE)**
A Java framework for cryptographic functionality, including message digests, encryption, signing, and X.509 certificates.
- ▶ **Java Secure Socket Extension (JSSE).**
- ▶ **Java Authentication and Authorization Service (JAAS).** Used for “reliable and secure” authentication of users, to determine who is currently executing Java code; and for authorization of users to ensure they have the permissions necessary for desired actions.
- ▶ **Java GSS-API.** Bindings for Generic Security Service API (RFC2853). Used for securely exchanging messages between communicating applications, using various underlying mechanisms (e.g., Kerberos).

Java Cryptography Extension (JCE)

- ▶ Crypto framework. A *provider* plug-in architecture allows multiple simultaneous implementations. Inclusion restricted because of import/export restrictions.

Java Cryptography Extension (JCE)

- ▶ Crypto framework. A *provider* plug-in architecture allows multiple simultaneous implementations. Inclusion restricted because of import/export restrictions.
- ▶ Has *algorithm independence*, clients don't need to understand algorithms; abstract "engine" classes provide different services.

Java Cryptography Extension (JCE)

- ▶ Crypto framework. A *provider* plug-in architecture allows multiple simultaneous implementations. Inclusion restricted because of import/export restrictions.
- ▶ Has *algorithm independence*, clients don't need to understand algorithms; abstract "engine" classes provide different services.
- ▶ *Service provider interfaces* (SPIs) added statically or dynamically; clients query installed providers to find out supported services. JVM and clients specify preference orders.

Java Cryptography Extension (JCE)

- ▶ Crypto framework. A *provider* plug-in architecture allows multiple simultaneous implementations. Inclusion restricted because of import/export restrictions.
- ▶ Has *algorithm independence*, clients don't need to understand algorithms; abstract "engine" classes provide different services.
- ▶ *Service provider interfaces* (SPIs) added statically or dynamically; clients query installed providers to find out supported services. JVM and clients specify preference orders.
- ▶ Key management is through a "keystore" database. Different providers may have different formats.

Java Cryptography Extension (JCE)

- ▶ Crypto framework. A *provider* plug-in architecture allows multiple simultaneous implementations. Inclusion restricted because of import/export restrictions.
- ▶ Has *algorithm independence*, clients don't need to understand algorithms; abstract "engine" classes provide different services.
- ▶ *Service provider interfaces* (SPIs) added statically or dynamically; clients query installed providers to find out supported services. JVM and clients specify preference orders.
- ▶ Key management is through a "keystore" database. Different providers may have different formats.
- ▶ SUN provider implements common formats and proprietary keystore type JKS.

Java Cryptography Extension (JCE)

- ▶ Crypto framework. A *provider* plug-in architecture allows multiple simultaneous implementations. Inclusion restricted because of import/export restrictions.
- ▶ Has *algorithm independence*, clients don't need to understand algorithms; abstract "engine" classes provide different services.
- ▶ *Service provider interfaces* (SPIs) added statically or dynamically; clients query installed providers to find out supported services. JVM and clients specify preference orders.
- ▶ Key management is through a "keystore" database. Different providers may have different formats.
- ▶ SUN provider implements common formats and proprietary keystore type JKS.
- ▶ See: [javax.crypto](#), [javax.crypto.interfaces](#), [javax.crypto.spec](#).

JCE cryptography services

- ▶ A cryptography service is associated with a particular algorithm or type, and manipulates or generates data, keys, algorithm parameters, keystores, or certificates.

JCE cryptography services

- ▶ A cryptography service is associated with a particular algorithm or type, and manipulates or generates data, keys, algorithm parameters, keystores, or certificates.
- ▶ Engine classes include:

MessageDigest	generate message digests (MDCs)
Signature	sign data and verify digital signatures.
KeyPairGenerator	generate public-private key-pair.
CertificateFactory	create certificates and CRLs.
KeyStore	create and manage key databases.
AlgorithmParameters	manage parameters for an algorithm.
SecureRandom	random or pseudo-random numbers.

JCE cryptography services

- ▶ A cryptography service is associated with a particular algorithm or type, and manipulates or generates data, keys, algorithm parameters, keystores, or certificates.
- ▶ Engine classes include:

MessageDigest	generate message digests (MDCs)
Signature	sign data and verify digital signatures.
KeyPairGenerator	generate public-private key-pair.
CertificateFactory	create certificates and CRLs.
KeyStore	create and manage key databases.
AlgorithmParameters	manage parameters for an algorithm.
SecureRandom	random or pseudo-random numbers.
- ▶ Factory methods in engine classes are used to return instances of the class, e.g.
`Signature.getInstance("SHA1withDSA").`

Java Secure Socket Extension (JSSE)

- ▶ The JSSE is also based on a provider plug-in architecture.
- ▶ Has a simple structure. Main use is with SSL client sockets, SSL server sockets, and SSL session handles. Sample classes:

<code>SSLSocket</code>	socket for SSL/TLS/WTLS protocols
<code>SSLSocketFactory</code>	factory for SSLSocket objects
<code>SSLServerSocket</code>	server socket for SSL/TLS/WTLS
<code>... Factory</code>	factory for SSLServerSockets
<code>SSLSession</code>	encapsulation of SSL session
- ▶ Creating SSL client or server sockets is as easy as creating ordinary Java TCP/IP sockets: each SSL class extends the corresponding ordinary TCP socket class, and provides a few extra hooks for setting security parameters.
- ▶ See [java.net.ssl](http://java.net/ssl), also java.net and [java.net.security.cert](http://java.net/security.cert).

Authentication and Authorization (JAAS)

- ▶ JAAS has a pluggable architecture; applications independent of underlying authentication methods. Implementation is decided at runtime, in a **login configuration file**.

Authentication and Authorization (JAAS)

- ▶ JAAS has a pluggable architecture; applications independent of underlying authentication methods. Implementation is decided at runtime, in a **login configuration file**.
- ▶ A **Subject** may have multiple identities; each is a **Principal** (name). Subjects own public and private **credentials** (e.g., key material).

Authentication and Authorization (JAAS)

- ▶ JAAS has a pluggable architecture; applications independent of underlying authentication methods. Implementation is decided at runtime, in a **login configuration file**.
- ▶ A **Subject** may have multiple identities; each is a **Principal** (name). Subjects own public and private **credentials** (e.g., key material).
- ▶ To authenticate, a **LoginContext** object is created, which then consults a configuration to load the required **LoginModules**. To authenticate a subject the `login` method is invoked for each module.

Authentication and Authorization (JAAS)

- ▶ JAAS has a pluggable architecture; applications independent of underlying authentication methods. Implementation is decided at runtime, in a **login configuration file**.
- ▶ A **Subject** may have multiple identities; each is a **Principal** (name). Subjects own public and private **credentials** (e.g., key material).
- ▶ To authenticate, a **LoginContext** object is created, which then consults a configuration to load the required **LoginModules**. To authenticate a subject the `login` method is invoked for each module.
- ▶ **Authorization** happens when a subject is associated with a thread's **AccessControlContext** using the **doAs** methods for performing actions (`java.security.PrivilegedAction.run`). Then principal-based entries in the current security policy are used.

Flaws in the Java infrastructure

- ▶ Java was touted from the start as a secure mechanism for mobile code. But it has suffered from flaws in both design and implementation, surveyed in 1999 by McGraw and Felten in *Securing Java*, see <http://www.securingjava.com>.

Flaws in the Java infrastructure

- ▶ Java was touted from the start as a secure mechanism for mobile code. But it has suffered from flaws in both design and implementation, surveyed in 1999 by McGraw and Felten in *Securing Java*, see <http://www.securingjava.com>.
- ▶ Most fundamental are any problems in the **Byte Code Verifier**, which checks proper use of JVMIL (protecting against “malicious” or merely buggy compilers):

Flaws in the Java infrastructure

- ▶ Java was touted from the start as a secure mechanism for mobile code. But it has suffered from flaws in both design and implementation, surveyed in 1999 by McGraw and Felten in *Securing Java*, see <http://www.securingjava.com>.
- ▶ Most fundamental are any problems in the **Byte Code Verifier**, which checks proper use of JVMIL (protecting against “malicious” or merely buggy compilers):

Flaws in the Java infrastructure

- ▶ Java was touted from the start as a secure mechanism for mobile code. But it has suffered from flaws in both design and implementation, surveyed in 1999 by McGraw and Felten in *Securing Java*, see <http://www.securingjava.com>.
- ▶ Most fundamental are any problems in the **Byte Code Verifier**, which checks proper use of JVMIL (protecting against “malicious” or merely buggy compilers):
 - ▶ no operand stack overflow/underflow

Flaws in the Java infrastructure

- ▶ Java was touted from the start as a secure mechanism for mobile code. But it has suffered from flaws in both design and implementation, surveyed in 1999 by McGraw and Felten in *Securing Java*, see <http://www.securingjava.com>.
- ▶ Most fundamental are any problems in the **Byte Code Verifier**, which checks proper use of JVMIL (protecting against “malicious” or merely buggy compilers):
 - ▶ no operand stack overflow/underflow
 - ▶ correct types and conversions

Flaws in the Java infrastructure

- ▶ Java was touted from the start as a secure mechanism for mobile code. But it has suffered from flaws in both design and implementation, surveyed in 1999 by McGraw and Felten in *Securing Java*, see <http://www.securingjava.com>.
- ▶ Most fundamental are any problems in the **Byte Code Verifier**, which checks proper use of JVMIL (protecting against “malicious” or merely buggy compilers):
 - ▶ no operand stack overflow/underflow
 - ▶ correct types and conversions
 - ▶ field accesses obey visibility modifiers

Flaws in the Java infrastructure

- ▶ Java was touted from the start as a secure mechanism for mobile code. But it has suffered from flaws in both design and implementation, surveyed in 1999 by McGraw and Felten in *Securing Java*, see <http://www.securingjava.com>.
- ▶ Most fundamental are any problems in the **Byte Code Verifier**, which checks proper use of JVMIL (protecting against “malicious” or merely buggy compilers):
 - ▶ no operand stack overflow/underflow
 - ▶ correct types and conversions
 - ▶ field accesses obey visibility modifiers

Flaws in the Java infrastructure

- ▶ Java was touted from the start as a secure mechanism for mobile code. But it has suffered from flaws in both design and implementation, surveyed in 1999 by McGraw and Felten in *Securing Java*, see <http://www.securingjava.com>.
- ▶ Most fundamental are any problems in the **Byte Code Verifier**, which checks proper use of JVMIL (protecting against “malicious” or merely buggy compilers):
 - ▶ no operand stack overflow/underflow
 - ▶ correct types and conversions
 - ▶ field accesses obey visibility modifiers

Type safety relies on byte code verification being correct. Unfortunately getting this right is complicated. . .

Flaws in Java itself – continued

- ▶ The Java Language Specification is written in English. It suffers from usual problems of large language specifications: missing details, ambiguity, and other inaccuracies.

Flaws in Java itself – continued

- ▶ The Java Language Specification is written in English. It suffers from usual problems of large language specifications: missing details, ambiguity, and other inaccuracies.
 - ▶ Sun BUG ID 6360463 (Dec 05): “offset item of the stack map frame” not defined in specification
... “renders most of discussion on type checking moot”

Flaws in Java itself – continued

- ▶ The Java Language Specification is written in English. It suffers from usual problems of large language specifications: missing details, ambiguity, and other inaccuracies.
 - ▶ Sun BUG ID 6360463 (Dec 05): “offset item of the stack map frame” not defined in specification
... “renders most of discussion on type checking moot”
- ▶ Sun’s implementations are usually taken as the reference behaviour. But these have had a series of type safety and access control failings (from 1.x SDKs to J2ME in mobile phone KVMs).

Flaws in Java itself – continued

- ▶ The Java Language Specification is written in English. It suffers from usual problems of large language specifications: missing details, ambiguity, and other inaccuracies.
 - ▶ Sun BUG ID 6360463 (Dec 05): “offset item of the stack map frame” not defined in specification
... “renders most of discussion on type checking moot”
- ▶ Sun’s implementations are usually taken as the reference behaviour. But these have had a series of type safety and access control failings (from 1.x SDKs to J2ME in mobile phone KVMs).
 - ▶ 8th Feb 2006, CVE-2006-0614,0615,0617: Sun fixes seven vulnerabilities in current JREs which allowed remote code to bypass sandbox using reflection.

Flaws in Java itself – continued

- ▶ The Java Language Specification is written in English. It suffers from usual problems of large language specifications: missing details, ambiguity, and other inaccuracies.
 - ▶ Sun BUG ID 6360463 (Dec 05): “offset item of the stack map frame” not defined in specification
... “renders most of discussion on type checking moot”
- ▶ Sun’s implementations are usually taken as the reference behaviour. But these have had a series of type safety and access control failings (from 1.x SDKs to J2ME in mobile phone KVMs).
 - ▶ 8th Feb 2006, CVE-2006-0614,0615,0617: Sun fixes seven vulnerabilities in current JREs which allowed remote code to bypass sandbox using reflection.
- ▶ Shows *defence in depth* is important; even with a careful Java security policy restricting what downloaded code can do, you should still beware *untrusted* code.

Outline

Web security issues

Java Security: Coding and Models

Trusting code

Language futures for security

The Trusted Computing Base

Trusted Computing Base (TCB)

The set of all components (hardware, software, human, ...) whose correct functioning is sufficient to ensure that the security policy is enforced.

- ▶ Equivalently: failure of the TCB causes failure of security.
Misplaced trust can hurt you!
- ▶ This motivates design principles for the TCB:
 - ▶ make it as small as possible
 - ▶ do not change it often
 - ▶ verify it carefully: so it is as secure as possible
- ▶ In access control systems, the TCB is the **Reference Monitor** implementation.

Palladium/TCPA/NGSCB/Trustworthy Computing

- ▶ PCs now contain a **Trusted Platform Module** (TPM) security chip with embedded master keys.

Palladium/TCPA/NGSCB/Trustworthy Computing

- ▶ PCs now contain a **Trusted Platform Module** (TPM) security chip with embedded master keys.
- ▶ Security model idea: PC boots, hashing BIOS, OS and application code. Builds a chain of trust.

Palladium/TCPA/NGSCB/Trustworthy Computing

- ▶ PCs now contain a **Trusted Platform Module** (TPM) security chip with embedded master keys.
- ▶ Security model idea: PC boots, hashing BIOS, OS and application code. Builds a chain of trust.
- ▶ Protection domains in OS extended into hardware (**secure keyboard reading, sound channels**). Desire: close down an open system (cf XBox).

Palladium/TCPA/NGSCB/Trustworthy Computing

- ▶ PCs now contain a **Trusted Platform Module** (TPM) security chip with embedded master keys.
- ▶ Security model idea: PC boots, hashing BIOS, OS and application code. Builds a chain of trust.
- ▶ Protection domains in OS extended into hardware (**secure keyboard reading, sound channels**). Desire: close down an open system (cf XBox).
- ▶ Allows certificates, e.g. **“this document created with v 1751 of MS Word, on Windows Vista Trusted, 27th August 2008, on Dell Megaplex ZZ5 S/N 5091237896”**. Files stored encrypted, cannot be decrypted on other machines.

Palladium/TCPA/NGSCB/Trustworthy Computing

- ▶ PCs now contain a **Trusted Platform Module** (TPM) security chip with embedded master keys.
- ▶ Security model idea: PC boots, hashing BIOS, OS and application code. Builds a chain of trust.
- ▶ Protection domains in OS extended into hardware (**secure keyboard reading, sound channels**). Desire: close down an open system (cf XBox).
- ▶ Allows certificates, e.g. **“this document created with v 1751 of MS Word, on Windows Vista Trusted, 27th August 2008, on Dell Megaplex ZZ5 S/N 5091237896”**. Files stored encrypted, cannot be decrypted on other machines.
- ▶ Many uses. Strong anti-privacy measures. Business clients: financial services, government, and healthcare. Home PC users: reduction in spyware, digital rights management (DRM). New uses: renting, lending, time-limited, etc. Considerable controversy (Stallman: “Traacherous Computing”).

Outline

Web security issues

Java Security: Coding and Models

Trusting code

Language futures for security

Language-based security

An active research area: applying programming language theory, designing new constructs and mechanisms.

Most work applies verification technology including static analysis, extended type systems and theorem proving.

- ▶ Proof-carrying code (PCC), which equips code with independently checkable safety certificates.

Language-based security

An active research area: applying programming language theory, designing new constructs and mechanisms.

Most work applies verification technology including static analysis, extended type systems and theorem proving.

- ▶ Proof-carrying code (PCC), which equips code with independently checkable safety certificates.
- ▶ Cyclone, Vault and others.
Add richer, safer and more expressive typing and annotations to existing languages.

Language-based security

An active research area: applying programming language theory, designing new constructs and mechanisms.

Most work applies verification technology including static analysis, extended type systems and theorem proving.

- ▶ Proof-carrying code (PCC), which equips code with independently checkable safety certificates.
- ▶ Cyclone, Vault and others.
Add richer, safer and more expressive typing and annotations to existing languages.
- ▶ Other security specialised typing includes:

Language-based security

An active research area: applying programming language theory, designing new constructs and mechanisms.

Most work applies verification technology including static analysis, extended type systems and theorem proving.

- ▶ Proof-carrying code (PCC), which equips code with independently checkable safety certificates.
- ▶ Cyclone, Vault and others.
Add richer, safer and more expressive typing and annotations to existing languages.
- ▶ Other security specialised typing includes:
 - ▶ detecting and preventing illegal **information flows**

Language-based security

An active research area: applying programming language theory, designing new constructs and mechanisms.

Most work applies verification technology including static analysis, extended type systems and theorem proving.

- ▶ Proof-carrying code (PCC), which equips code with independently checkable safety certificates.
- ▶ Cyclone, Vault and others.
Add richer, safer and more expressive typing and annotations to existing languages.
- ▶ Other security specialised typing includes:
 - ▶ detecting and preventing illegal **information flows**
 - ▶ **ensuring authentication** before authorisation




Language-based security

An active research area: applying programming language theory, designing new constructs and mechanisms.

Most work applies verification technology including static analysis, extended type systems and theorem proving.

- ▶ Proof-carrying code (PCC), which equips code with independently checkable safety certificates.
- ▶ Cyclone, Vault and others.
Add richer, safer and more expressive typing and annotations to existing languages.
- ▶ Other security specialised typing includes:
 - ▶ detecting and preventing illegal **information flows**
 - ▶ **ensuring authentication** before authorisation
 - ▶ fixing patterns of **access control**, e.g. close file after opening.

References

-  Mark G. Graff and Kenneth R. van Wyk.
Secure Coding: Principles & Practices.
O'Reilly, 2003.
-  Sverre H. Huseby.
Innocent Code: a security wake-up call for web programmers.
Wiley.
-  Gary McGraw.
Securing Java.
John Wiley & Sons, 1999.

Recommended Reading

For web programming: Huseby's book, or the more recent information at OWASP, <https://www.owasp.org>.
For Java security: the Oracle/CERT guidelines at <https://www.securecoding.cert.org>