

Compiling Techniques

Lecture 4: Automatic Lexer Generation (EaC§2.4)


Christophe Dubach

27 September 2016

Table of contents

- 1 Finite State Automata for Regular Expression
 - Finite State Automata
 - Non-determinism
- 2 From Regular Expression to Generated Lexer
 - Regular Expression to NFA
 - From NFA to DFA
- 3 Final Remarks

Automatic Lexer Generation



- Starting from a collection of regular expressions (RE) we automatically generate a Lexer.
- We use *finite state automata* (FSA) for the construction

Definition: finite state automata

A finite state automata is defined by:


- S , a finite set of states
- Σ , an alphabet, or character set used by the recogniser
- $\delta(s, c)$, a transition function (takes a state and a character and returns new state)
- s_0 , the initial or start state
- S_F , a set of final states (a stream of characters is accepted iff the automata ends up in a final state)


Finite State Automata for Regular Expression

Example: register names

```
register ::= 'r' ('0'|'1'|...|'9') ('0'|'1'|...|'9')*
```

The RE (Regular Expression) corresponds to a recogniser
(or finite state automata):

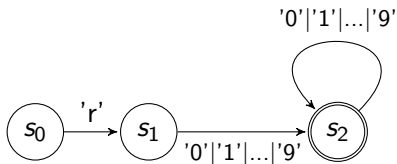

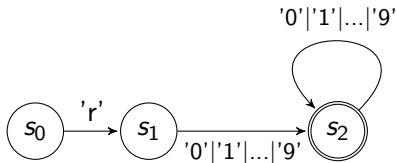

Finite State Automata (FSA) operation:

- Start in state s_0 and take transitions on each input character
- The FSA accepts a word x iff x leaves it in a final state (s_2)

Examples:

- **r17** takes it through s_0, s_1, s_2 and accepts
- **r** takes it through s_0, s_1 and fails
- **a** starts in s_0 and leads straight to failure

Table encoding and skeleton code

To be useful a recogniser must be turned into code

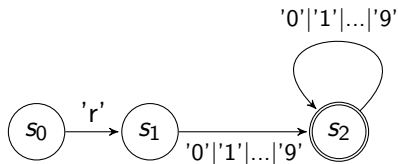


Table encoding RE

δ	'r'	'0' '1' ... '9'	others
s ₀	s ₁	error	error
s ₁	error	s ₂	error
s ₂	error	s ₂	error

Skeleton recogniser


```

c = next character
state = s0
while (c ≠ EOF)
    state =  $\delta(\text{state}, c)$ 
    c = next character
if (state final)
    return success
else
    return error
  
```

Deterministic Finite Automaton

Each RE corresponds to a Deterministic Finite Automaton (DFA).
 However, it might be hard to construct directly.

What about an RE such as $(a|b)^*abb$?

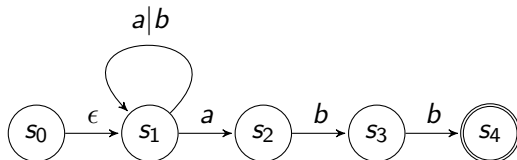

This is a little different:

- s_0 has a transition on ϵ , which can be followed without consuming an input character
- s_1 has two transitions on a
- This is a **Non-deterministic Finite Automaton (NFA)**

Non-deterministic vs deterministic finite automata

Deterministic finite state automata (DFA):

- All edges leaving the same node have distinct labels
- There is no ϵ transition

Non-deterministic finite state automata (NFA):

- Can have multiple edges with the same label leaving from the same node
- Can have ϵ transition
- This means we might have to backtrack

Automatic Lexer Generation


It is possible to systematically generate a lexer for any regular expression.

This can be done in three steps:


- 1 regular expression (RE) \rightarrow non-deterministic finite automata (NFA)
- 2 NFA \rightarrow deterministic finite automata (DFA)
- 3 DFA \rightarrow generated lexer

1st step: RE \rightarrow NFA (Ken Thompson, CACM, 1968)


"x"




[M]




M|N




MN





M*

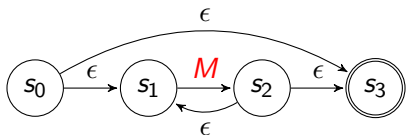

M+



Example: $a(b|c)^*$

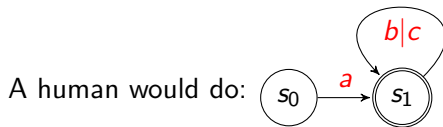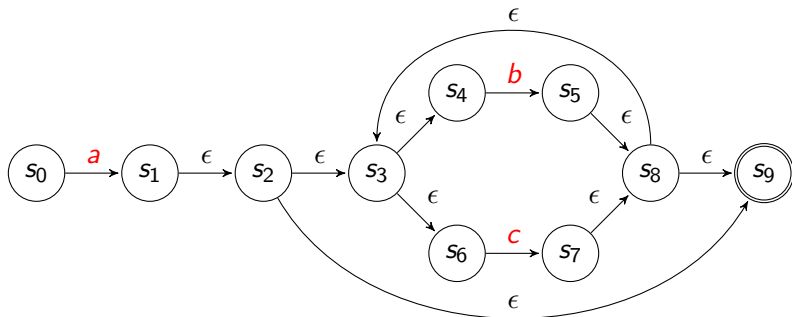

Step 2: NFA \rightarrow DFA

Executing a non-deterministic finite automata requires backtracking, which is inefficient. To overcome this, we need to construct a DFA from the NFA.

The main idea:

- We build a DFA which has one state for each set of states the NFA could end up in.
- A set of state is final in the DFA if it contains the final state from the NFA.
- Since the number of states in the NFA is finite (n), the number of possible sets of states is also finite (maximum 2^n).

Assuming the state of the NFA are labelled s_i and the states of the DFA we are building are labelled q_i .

We have two key functions:

- $\text{reachable}(s_i, \alpha)$ returns the set of states reachable from s_i by consuming character α
- $\epsilon\text{-closure}(s_i)$ returns the set of states reachable from s_i by ϵ (e.g., without consuming a character)

The Subset Construction algorithm (Fixed point iteration)

```
 $q_0 = \epsilon\text{-closure}(s_0)$ ;  $Q = \{q_0\}$ ; add  $q_0$  to WorkList  
while (WorkList not empty)  
  remove  $q$  from WorkList  
  for each  $\alpha \in \Sigma$   
     $subset = \epsilon\text{-closure}(\text{reachable}(q, \alpha))$   
     $\delta(q, \alpha) = subset$   
    if ( $subset \notin Q$ ) then  
      add  $subset$  to  $Q$  and to WorkList
```

The algorithm (in English)

- Start from start state s_0 of the NFA, compute its ϵ -closure
- Build subset from all states reachable from q_0 for character α
- Add this subset to the transition table/function δ
- If the subset has not been seen before, add it to the worklist
- Iterate until no new subset are created

Informal proof of termination

- Q contains no duplicates (test before adding)
- similarly we will never add twice the same subset to the worklist
- bounded number of states; maximum 2^n subsets, where n is number of state in NFA

⇒ **the loop halts**


End result

- S contains all the reachable NFA states
- It tries each symbol in each s_i
- It builds every possible NFA configuration

⇒ **Q and δ form the DFA**

NFA \rightarrow DFA

$a(b|c)^*$

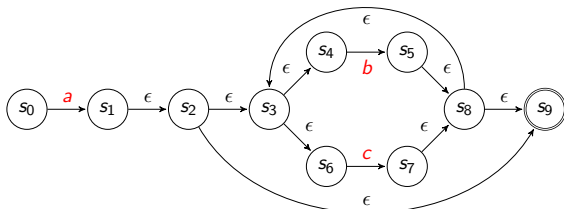

	NFA states	ϵ -closure(reachable(q, α))		
		a	b	c
q_0	S_0	q_1	none	none
q_1	$S_1, S_2, S_3,$ S_4, S_6, S_9	none	q_2	q_3
q_2	$S_5, S_8, S_9,$ S_3, S_4, S_6	none	q_2	q_3
q_3	$S_7, S_8, S_9,$ S_3, S_4, S_6	none	q_2	q_3

Resulting DFA for $a(b|c)^*$

Graph

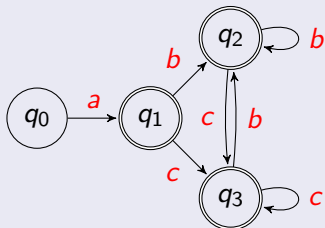


Table encoding

	a	b	c
q_0	q_1	error	error
q_1	error	q_2	q_3
q_2	error	q_2	q_3
q_3	error	q_2	q_3

- Smaller than the NFA
- All transitions are deterministic (no need to backtrack!)
- Could be even smaller
 (see EaC§2.4.4 Hopcroft's Algorithm for minimal DFA)
- Can generate the lexer using skeleton recogniser seen earlier

What can be so hard?

Poor language design can complicate lexing

- **PL/I** does not have reserved words (keywords):
if then then then = else; else else = then
- In **Fortran & Algol68** blanks (whitespaces) are insignificant:
do 10 i = 1,25 \cong do 10 i = 1,25 (loop)
do 10 i = 1.25 \cong do10i = 1.25 (assignment)
- In **C,C++,Java** string constants can have special characters:
newline, tab, quote, comment delimiters, ...

Building Lexer

The important point:

- All this technology lets us automate lexer construction
- Implementer writes down regular expressions
- Lexer generator builds NFA, DFA and then writes out code
- This reliable process produces fast and robust lexers

For most modern language features, this works:

- As a language designer you should think twice before introducing a feature that defeats a DFA-based lexer
- The ones we have seen (e.g., insignificant blanks, non-reserved keywords) have not proven particularly useful or long lasting

Next lecture

Parsing:

- Context-Free Grammars
- Dealing with ambiguity
- Recursive descent parser