


# The Ariane 5 Launcher Failure


---

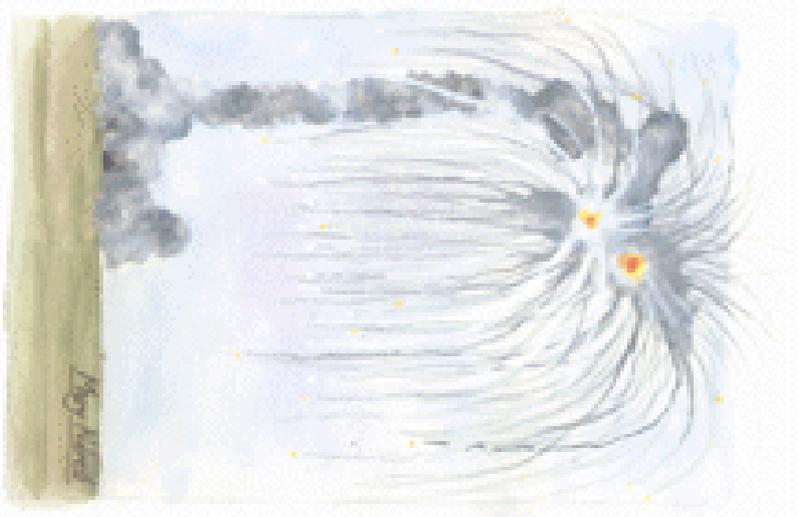

June 4th 1996  
Total failure of the  
Ariane 5 launcher  
on its maiden flight

# Ariane 5

---

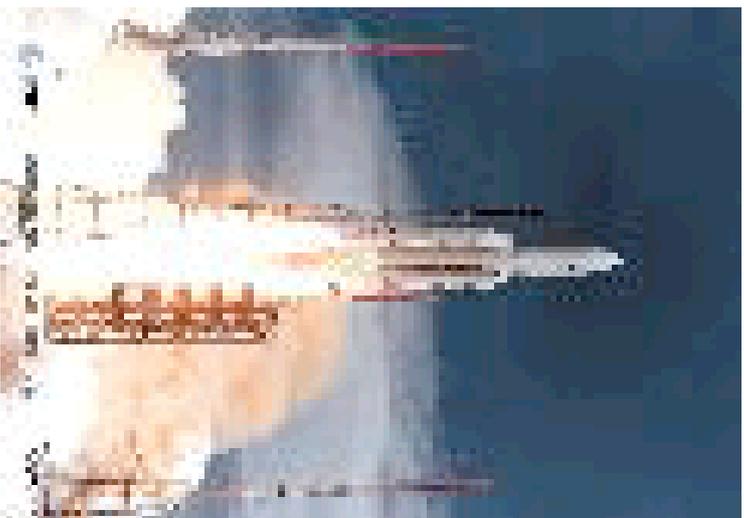

- A European rocket designed to launch commercial payloads (e.g. communications satellites, etc.) into Earth orbit
- Successor to the successful Ariane 4 launchers
- Ariane 5 can carry a heavier payload than Ariane 4

# Launcher failure

---

- Approximately 37 seconds after a successful lift-off, the Ariane 5 launcher lost control
- Incorrect control signals were sent to the engines and these swivelled so that unsustainable stresses were imposed on the rocket
- It started to break up and self-destructed
- The system failure was a direct result of a software failure. However, it was symptomatic of a more general systems validation failure

# The problem

---

- The attitude and trajectory of the rocket are measured by a computer-based inertial reference system. This transmits commands to the engines to maintain attitude and direction
- The software failed and this system and the backup system shut down
- Diagnostic commands were transmitted to the engines which interpreted them as real data and which swivelled to an extreme position

# Software failure

---

- Software failure occurred when an attempt to convert a 64-bit floating point number to a signed 16-bit integer caused the number to overflow.
- There was no exception handler associated with the conversion so the system exception management facilities were invoked. These shut down the software.
- The backup software was a copy and behaved in exactly the same way.

# Avoidable failure?

---

- The software that failed was reused from the Ariane 4 launch vehicle. The computation that resulted in overflow was not used by Ariane 5.
- Decisions were made
  - Not to remove the facility as this could introduce new faults
  - Not to test for overflow exceptions because the processor was heavily loaded. For dependability reasons, it was thought desirable to have some spare processor capacity

# Why not Ariane 4?

---

- The physical characteristics of Ariane 4 (A smaller vehicle) are such that it has a lower initial acceleration and build up of horizontal velocity than Ariane 5
- The value of the variable on Ariane 4 could never reach a level that caused overflow during the launch period.

# Validation failure

---

- As the facility that failed was not required for Ariane 5, there was no requirement associated with it.
- As there was no associated requirement, there were no tests of that part of the software and hence no possibility of discovering the problem.
- During system testing, simulators of the inertial reference system computers were used. These did not generate the error as there was no requirement!

# Review failure

---

- The design and code of all software should be reviewed for problems during the development process
- Either
  - The inertial reference system software was not reviewed because it had been used in a previous version
  - The review failed to expose the problem or that the test coverage would not reveal the problem
  - The review failed to appreciate the consequences of system shutdown during a launch

# Lessons learned

---

- Don't run software in critical systems unless it is actually needed
- As well as testing for what the system should do, you may also have to test for what the system should not do
- Do not have a default exception handling response which is system shut-down in systems that have no fail-safe state

# Lessons learned

---

- In critical computations, always return best effort values even if the absolutely correct values cannot be computed
- Wherever possible, use real equipment and not simulations
- Improve the review process to include external participants and review all assumptions made in the code

# Avoidable failure

---

- The designer's of Ariane 5 made a critical and elementary error.
- They designed a system where a single component failure could cause the entire system to fail